




One Rack Unit Multi-Extender Rack Shelf

AT-RACK-1RU-ME

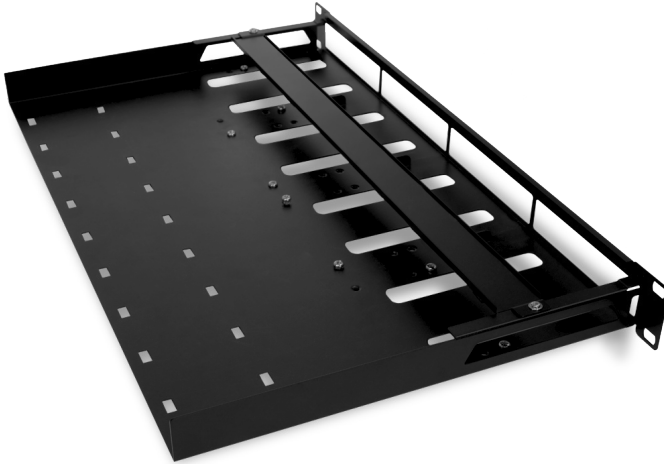

The Atlona **AT-RACK-1RU-ME** is a heavy duty, 1U rack shelf designed for installation of up to four quarter rack wide devices. The rack shelf is compatible with the 70 meter length HDR extender series, UHD extenders, OME extenders, and Avance extenders.

Package Contents

1 x AT-RACK-1RU-ME	8 x Cable ties
1 x Stabilizing bar (pre-installed) w/2 screws and washers	8 x rubber feet
8 x Screws	1 x Installation Guide

Compatible Devices


AT-AVA-EX70-2PS-KIT	AT-HDR-M2C
AT-AVA-EX70-KIT	AT-UHD-EX-100CE-KIT
AT-AVA-EX70C-KIT	AT-UHD-EX-100CE-TX
AT-AVA-EX70C-BP-KIT	AT-UHD-EX-100CE-TX-PD
AT-AVA-EX100CE-BP-KIT	AT-UHD-EX-100CE-RX
AT-OME-EX-KIT (TX only)	AT-UHD-EX-100CE-RX-PSE
AT-OME-EX-TX	AT-UHD-EX-70-2PS
AT-OME-EX-KIT-LT	AT-UHD-EX-70-KIT
AT-OME-RX11	AT-UHD-EX-70C-KIT
AT-HDR-EX-70-2PS	AT-UHD-EX-70C-TX
AT-HDR-EX-70C-KIT	AT-UHD-EX-70C-RX



IMPORTANT: Visit <https://atlona.com/product/at-rack-1ru-me/> for the latest compatibility list.

Mounting Instructions


1. Place the rack on a flat surface.

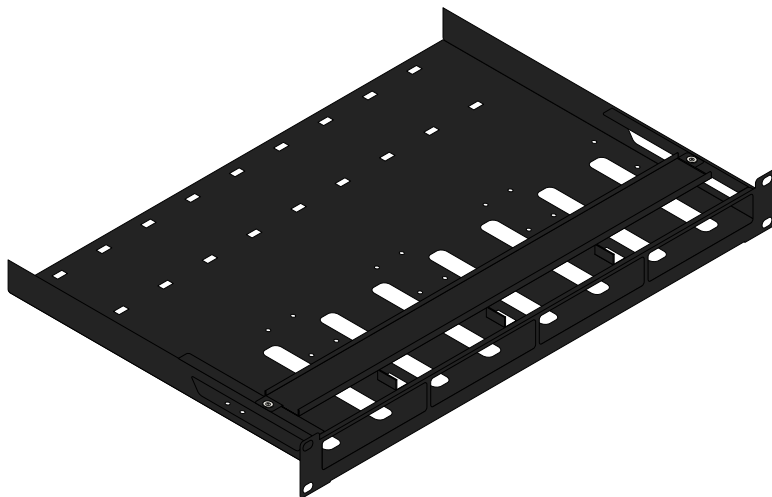


2. Slide the first quarter rack width device into the rack.
3. Secure it by placing two of the included screws in the holes directly behind the device.




NOTE: Do not over tighten the screws. The screw will hold the unit in place to avoid it moving back and forth while connecting cables or pressing front panel buttons.

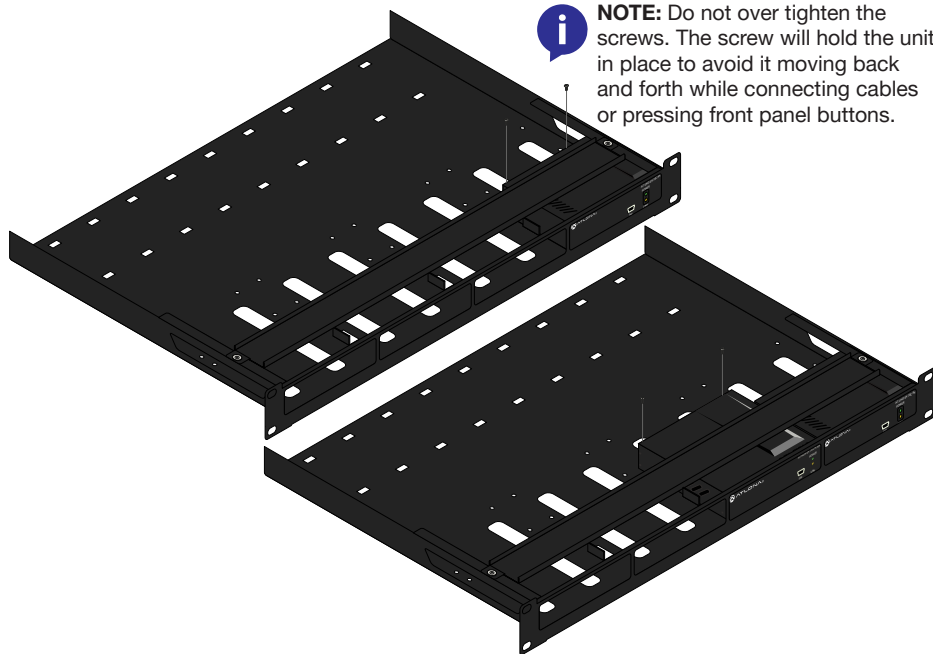

4. Repeat for up to 4 quarter rack width devices.


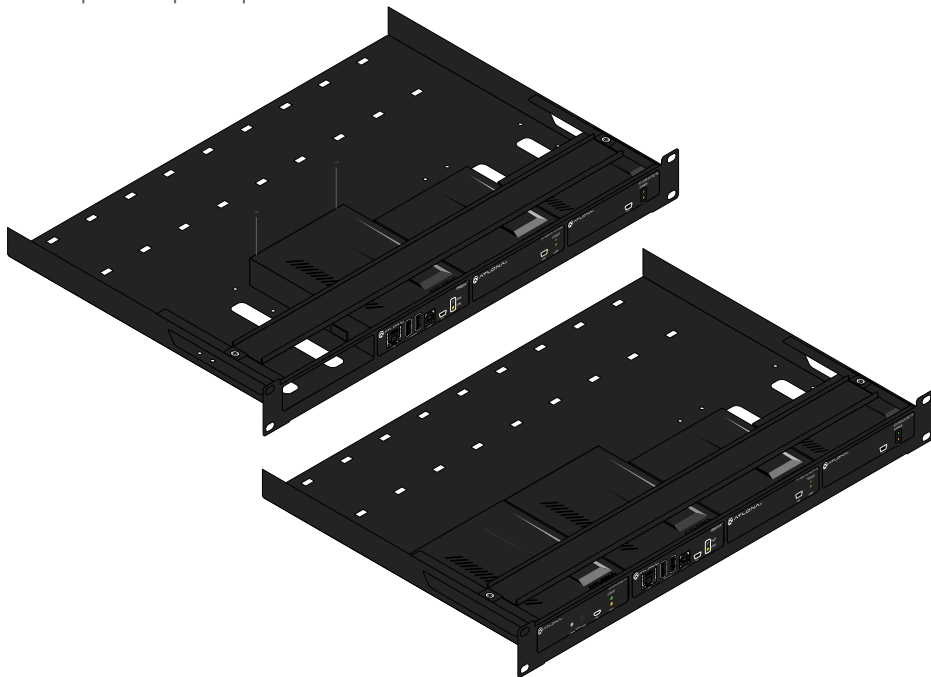


5. Once the devices are installed, the power supplies can be installed on the rack. Place the power supplies on the back of the rack and use the cable ties to keep them in place. There is space for up to four power supplies, some devices are PoE powered and will not require power supplies.

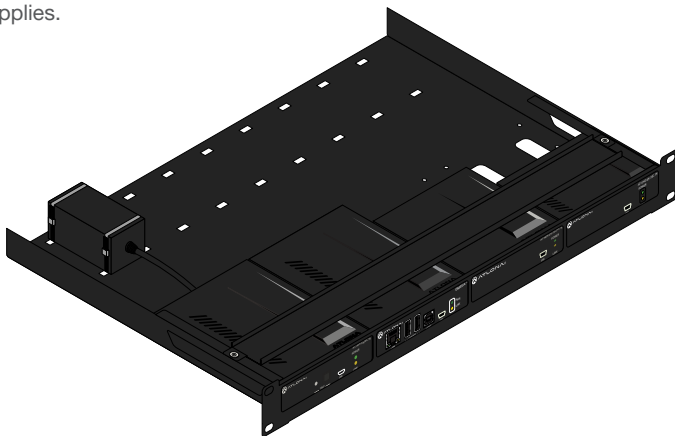

NOTE: If there is any vertical movement from the devices, the included rubber feet can be affixed to the bottom of the rack bar. Some slight bowing may occur, it will not effect the rest of the devices. See instructions on next page for feet installation.


6. *Optional* Remove the screw and washer from the stabilizing bar across the top of the rack.

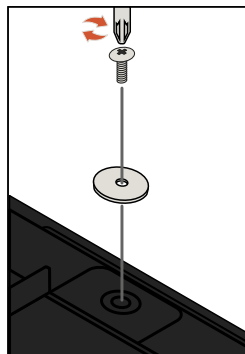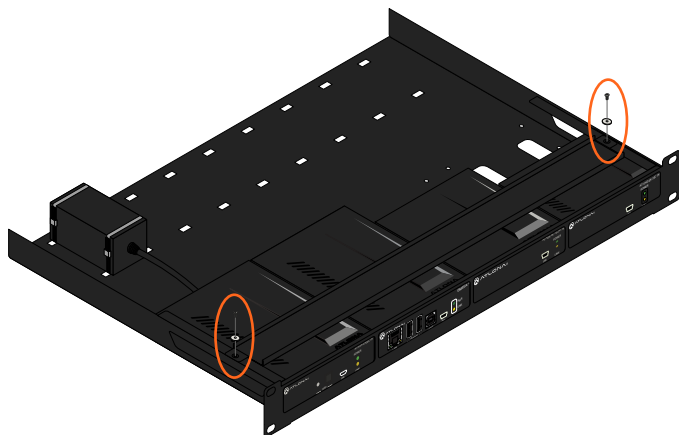


7. *Optional* Once the bar is removed, peel the feet from the paper and place the sticky side to the bottom of the stabilizing bar.



NOTE: 8 rubber feet have been included. Place up to two feet per device on the bar. Some slight bowing may occur.

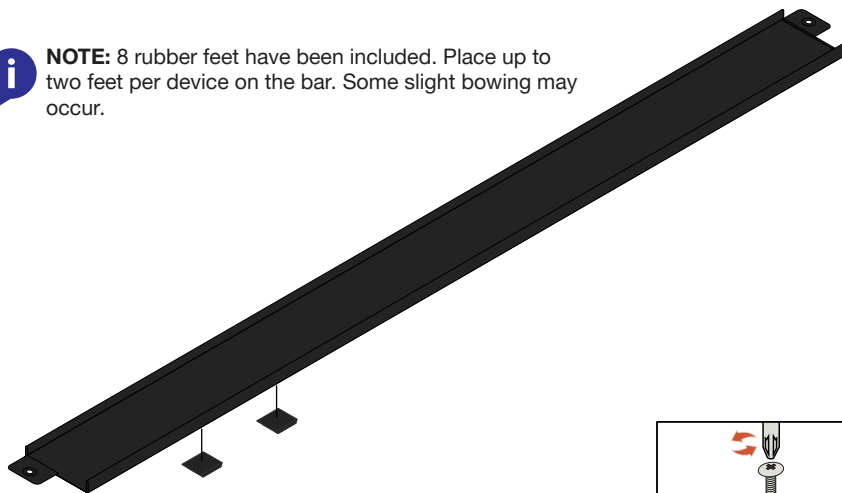

8. *Optional* Once the feet are attached, reattach the stabilizing bar to the rack shelf with the previously removed screw and washer.

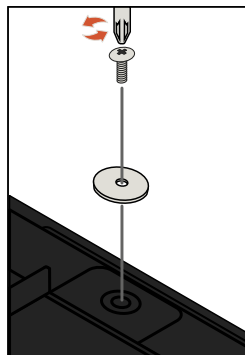

Warranty

To view the product warranty, use the following link or QR code:

<https://atlona.com/warranty/>.



English Declaration of Conformity

The English version can be found under the resources tab at:

<https://atlona.com/product/at-rack-1ru-me/>.



Chinese Declaration of Conformity 中国RoHS合格声明

由SKU列出於:

<https://atlona.com/about-us/china-rohs/>.

